

CLICK IT AND SEE

Application



Main Features

- For Stable Performance: Dual inverters controller, upgradable PLC system, self-failure diagnosis, double encoder.

- For Easy Operation: Touch screen monitor, independant temperature PID controller,
- For Adapability: One set of machine can be applicated to different kind of product via optional devices, such as air-filling device, feeding line, etc.

Main Engine

Item	DS-320L	DS-420L	DS-520L	DS-720L
Measuring Range	150 ~ 150ml	150-1500ml	150~2000mL	150~4000ml
Packaging Speed	5 ~ 70 bags/min	5-60 bags/min	10~50 bags/min	10~40 bags/min
Bag Width	50 ~ 150mm	60-200mm	80~250mm	100-350mm
Bag Length	80 ~ 240mm	80-300mm	80~350mm	100~450mm
Film Roll Width	Max.320mm	Max.420mm	Max:520mm	Max:720mm
Film Thickness	0.04-0.08mm			
Machine Size	(L)1185 x (W)935 x (H)1245mm	(L)1217 x (W)1015 x (H)1343mm	(L)1488*(W)1080*(H)1490mm	(L)1716*(W)1260*(H)1820mm
Weight	550KG	650KG	750KG	900KG
Power	220V, 50/60HZ, 2KVA	220V, 50/60HZ,	220V, 50/60HZ, 3KVA	220V, 50/60HZ,
Optional Device	Date Coder / Air-filling Device / Punching Device			
Machine Packing	Wooden Box			



Pump

Item	Pump
volume	10-500 ml
tolerance	$\pm 1\%$
speed	10-35 kg
power	20 W
option	The pumper can be customized.





Supporting Platfrom

ITEM	Supporting Platform
Measurement	L)1800* W)1800* H)1800~2000mm
Material	304 stainless stell or carbon steel



Detailed Images

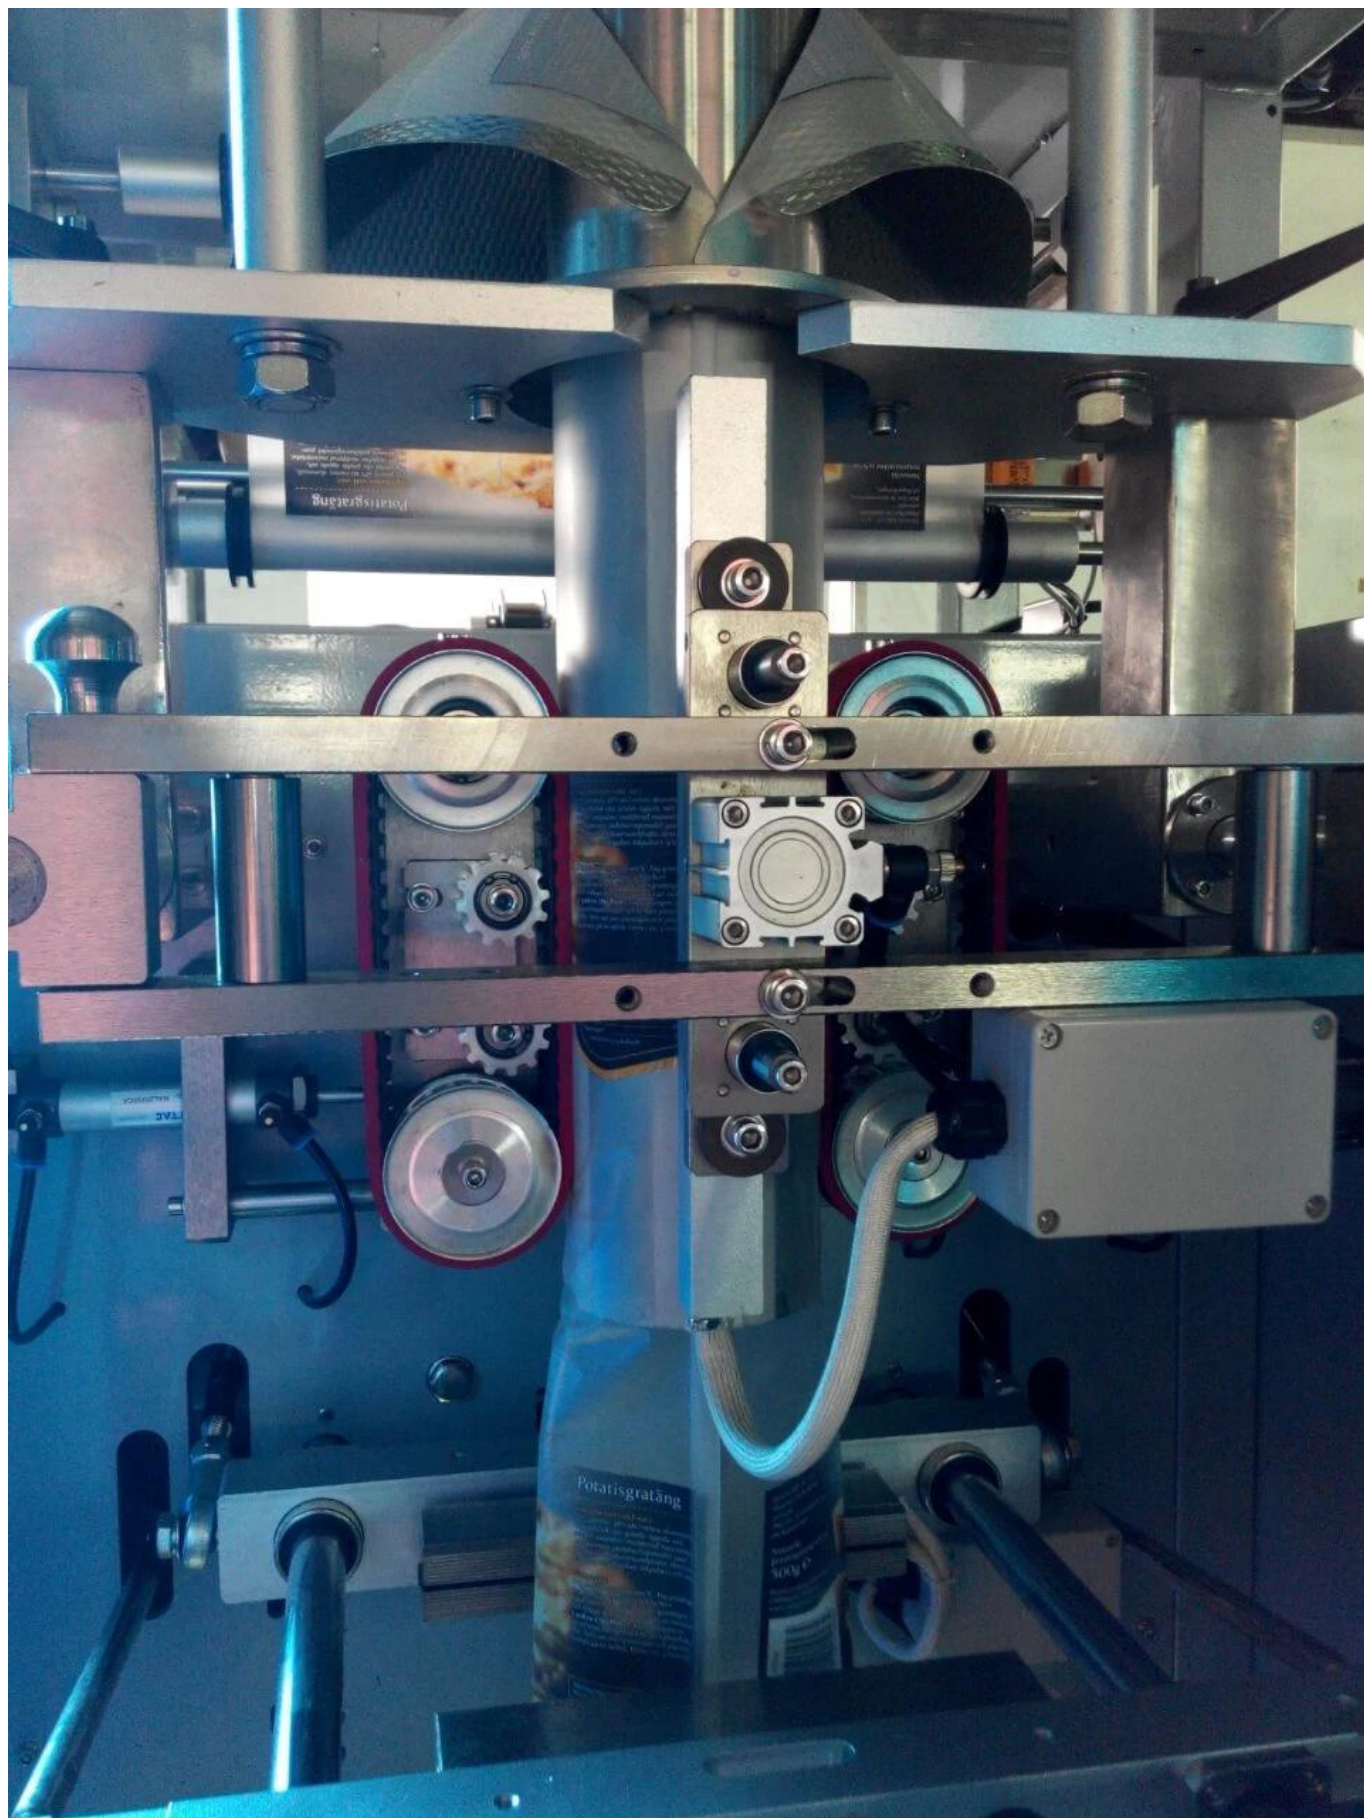

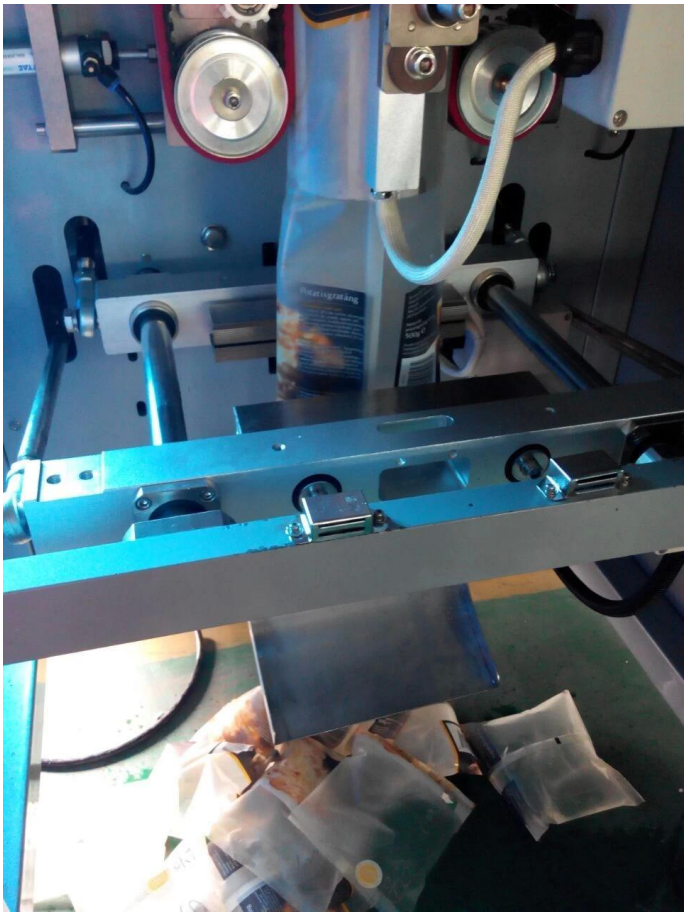



Package (CBM: 3.733m³ Gross Weight: 500kg)





Our Team



Oil Pouch Packing Machine With Automatic Liquid Packaging Machine