

[illegible]

□ □ □ □ □ □ □ □ □ □



- **On/Off (Relay) Control:** The simplest control method, where the PLC output is either fully on or fully off. It is suitable for controlling devices that have two states, such as a motor or a light.
- **Pulse Width Modulation (PWM) Control:** The PLC output is turned on and off at a specific frequency to create an average power level. This is used for controlling the speed of a motor or the brightness of a light.
- **Analog Control:** The PLC output is a continuous signal (e.g., 4-20 mA current or 0-10 V voltage) that is proportional to the desired setpoint. This is used for controlling processes that require precise control, such as temperature or pressure.

□□□□□□□□□□□□□□□□

Item	DS-320L	DS-420L	DS-520L	DS-720L
Measuring Range	150 ~ 150ml	150-1500ml	150~2000mL	150~4000ml
Packaging Speed	5 ~ 70 bags/min	5-60 bags/min	10~50 bags/min	10~40 bags/min
Bag Width	50 ~ 150mm	60-200mm	80~250mm	100-350mm
Bag Length	80 ~ 240mm	80-300mm	80~350mm	100~450mm
Film Roll Width	Max.320mm	Max.420mm	Max:520mm	Max:720mm
Film Thickness	0.04-0.08mm			
Machine Size	(L)1185 x (W)935 x (H)1245mm	(L)1217 x (W)1015 x (H)1343mm	(L)1488*(W)1080*(H)1490mm	(L)1716*(W)1260*(H)1820mm
Weight	550KG	650KG	750KG	900KG
Power	220V, 50/60HZ, 2KVA	220V, 50/60HZ,	220V, 50/60HZ, 3KVA	220V, 50/60HZ,
Optional Device	Date Coder / Air-filling Device / Punching Device			
Machine Packing	Wooden Box			



□□□□□□□□

Item	Screw Metering
Feeder Volume	60L
Filling Range	100-5000g
Packing Accuracy	0.3-1%
Packing Speed	20-80 bags/min
Powder	220V, 2.3KW
Weight	150 kg
Size	L)1030* W)690* H)1100 mm




Platfrom

ITEM	Supporting Platform
Measurement	L)1800* W)1800* H)1800~2000mm
Material	304 stainless stell or carbon steel



[illegible]A stainless steel industrial machine, possibly a mixer or conveyor, featuring a large hopper and a long, angled discharge chute. The machine is mounted on a sturdy metal frame with four legs. A motor is visible at the base of the hopper, and a control panel is located on the right side of the frame. The entire unit is constructed from polished stainless steel.

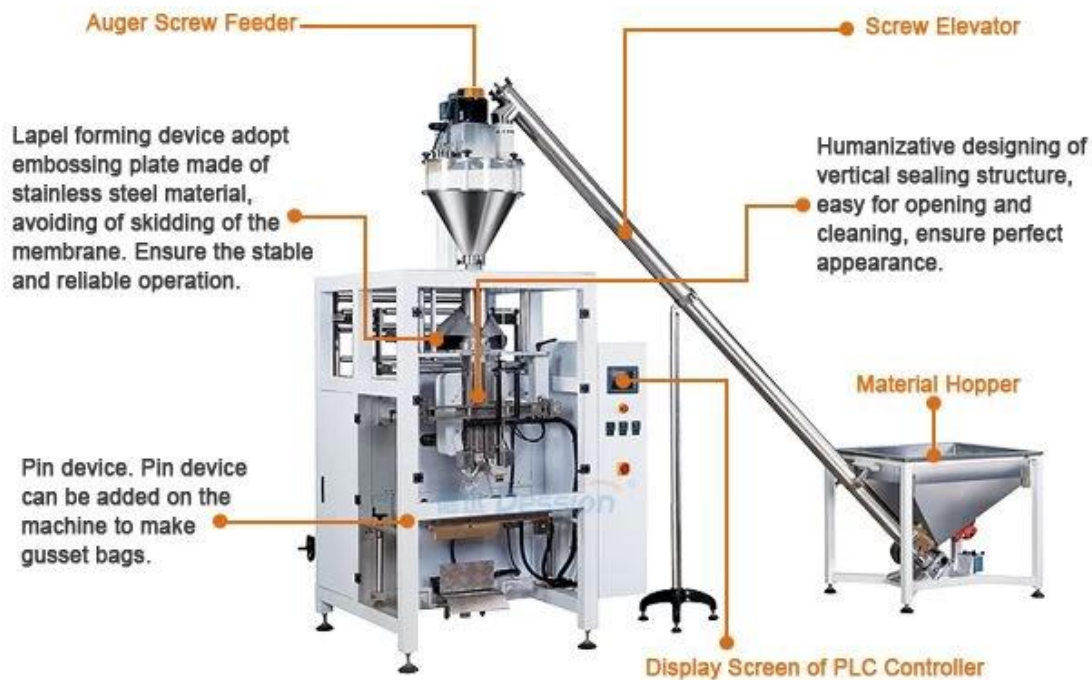

Related Equipment



□□□□□□□□□□□□□□□□



same 304# stainless steel material, Our Dession,
offer you 360 different surface treatment

□□□□□□□□□□

